


Technical data sheet

Hose reel out of PP

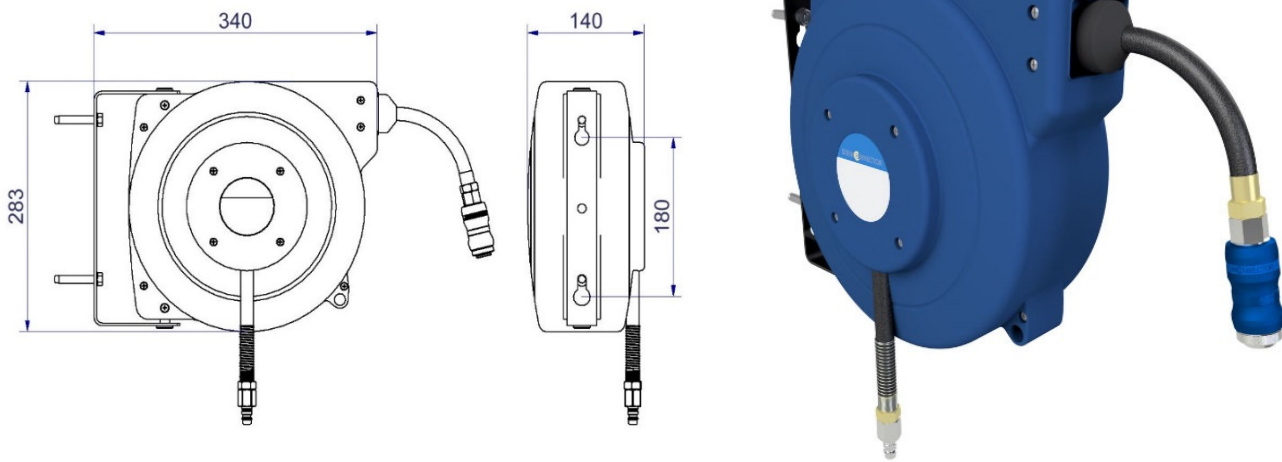


Technology

- Durable construction made of high quality, impact resistant polypropylene
- Integrated locking mechanism - automatically locks the hose at the desired length
- For pneumatic applications (other media on request)
- Removable wall bracket
- Flex hose with kink protection at the ends
- 180° swiveling
- Temperature range -15°C to +60°C
- Pressure range max. 15 Bar / 200 PSI

Scope of delivery

- Hose reel
- Safety vent coupling BiTec with suitable EU plug
- In lengths 8m or 15m
- 2x robust mounting dowels

Hose reel in two lengths	Item number:	Max. pressure	Hose-length	Weight
	NUSY1	15bar	8m	6,5kg
	NUSY2	15bar	15m	7,5kg